


WHEN SAFETY COMES FIRST
SPRAYDRENCH[®]
 EMERGENCY SAFETY SHOWERS

MO 000 SH

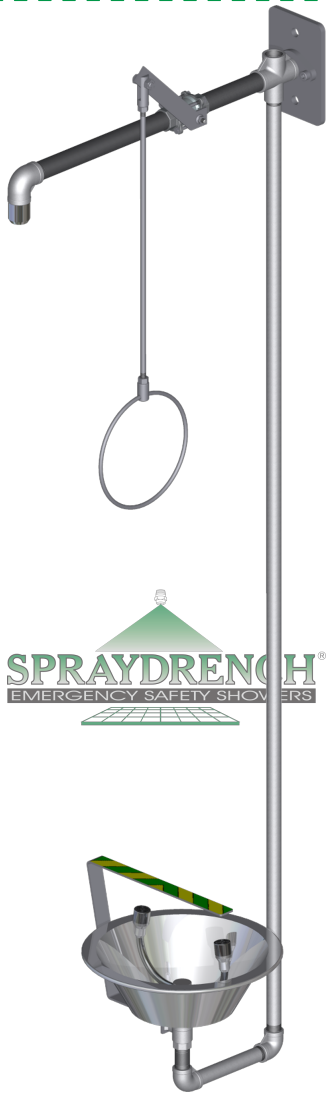

Detailed Description

Wall Mounted Safety Shower with Hand/Push Operated Rigid Emergency Eyewash Station c/w Twin Aerator Nozzle with Dust Caps

Optional Extras

- Scald &/or Freeze Protection Valve
- Eyewash Support
- Additional Options Available on Request

Best Suited Applications

- Low risk areas
- Laboratories
- Sample points
- School/University low risk laboratories
- Workshops
- Fuel load/offloading
- High dust areas

Inlet : 3/4" BSP(F)

Primary Shower Nozzle (1 off SD34DN)

85 lpm

Eyewash: Twin Aerator Nozzles

20 lpm

Flow Rates at design pressure of ±2.5 bar(g)

Additional Info.

Material of Construction Stainless Steel

Approx. Floor Foot Print (cm) ±55 (L) x32 (W) x160 (H)

Single Unit Weight (kg) ±11

Typ. Single Unit Pack Dim. (cm) ±65 (L) x 42 (W) x 170 (H)

All **SPRAYDRENCH**[®] products are manufactured according to the following standards:

ANSI Z358.1-2014
 DIN 12899-3:2008

EN15154-1:2006-12
 EN15154-2:2006-12
 EN15154-5:2019-12

Further Detail Available on Request

- Manually Operated
- Wall Mounted
- Stainless Steel
- Hand Operated Eye Wash

MO 000 S H

TEL: +27 (0)11 466 2100

spray nozzle (PTY) LTD

sales@spraynozzle.co.za

PO BOX 2369, HALFWAY HOUSE, SOUTH AFRICA, 1685 | REG:1971/014137
 WWW.SPRAYDRENCH.CO.ZA | WWW.SPRAYNOZZLE.CO.ZA

