


WHEN SAFETY COMES FIRST  
**SPRAYDRENCH**<sup>®</sup>  
 EMERGENCY SAFETY SHOWERS

PO 022 SHS

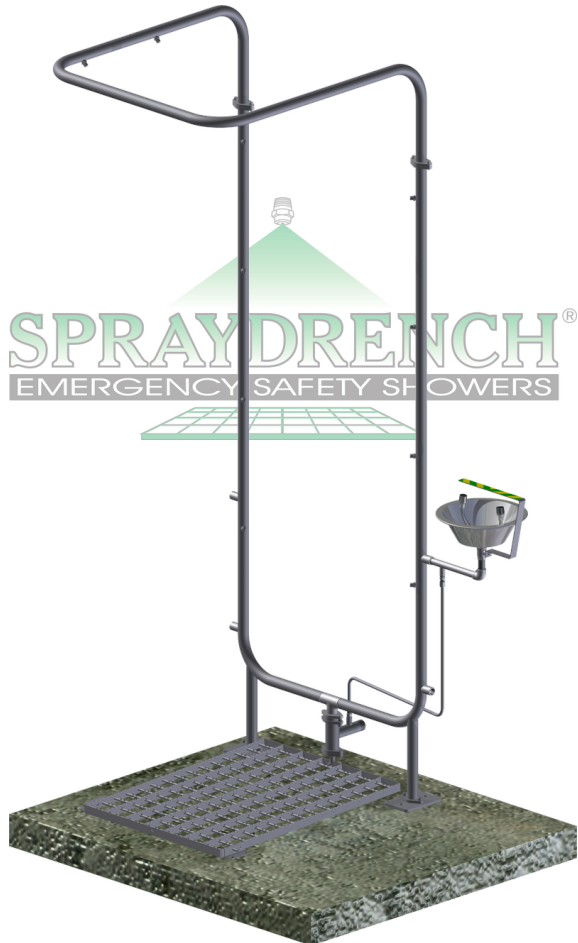

**SPRAYDRENCH**<sup>®</sup>  
 EMERGENCY SAFETY SHOWERS

Detailed Description

Platform Operated Double Column Drench Shower c/w Hand/Push Operated Rigid Emergency Eyewash Station c/w Twin Aerator Nozzle with Dust Caps

Optional Extras

- Scald &/or Freeze Protection Valve
- Additional Options Available on Request

Best Suited Applications

- High risk areas
- Spraying operations
- Hazardous substances dispensing areas
- Hazardous substances storage
- Hazardous substances mixing areas
- Chemical plants
- Chemical and toxic material processing

Inlet : 1" BSP(M)

Primary Shower Nozzles (15 off SD14DN)

123 lpm

Eyewash: Twin Aerator Nozzles

20 lpm

Flow Rates at design pressure of ±2.5 bar(g)

Additional Info.

Material of Construction Stainless Steel  
 Approx. Floor Foot Print (cm) ±130 (L) x120 (W) x235 (H)  
 Single Unit Weight (kg) ±38  
 Typ. Single Unit Pack Dim. (cm) ±190 (L) x91 (W) x41 (H)

All **SPRAYDRENCH**<sup>®</sup> products are manufactured according to the following standards:

ANSI Z358.1-2014  
 DIN 12899-3:2008

EN15154-1:2006-12  
 EN15154-2:2006-12  
 EN15154-5:2019-12

Further Detail Available on Request

- Platform Operated
- Double Column Free Standing
- Stainless Steel
- Hand Operated Eye Wash
- Grade 316 SS

PO 022 SHS

TEL: +27 (0)11 466 2100 | FAX: +27 (0)11 466 0618

**spray nozzle** (PTY) LTD

sales@spraynozzle.co.za

PO BOX 2369, HALFWAY HOUSE, SOUTH AFRICA, 1685 | REG:1971/014137  
 WWW.SPRAYDRENCH.CO.ZA | WWW.SPRAYNOZZLE.CO.ZA

**SPRAYDRENCH**<sup>®</sup>  
 EMERGENCY SAFETY SHOWERS